

iLOFT COLLECTION

VIDEO DOOR ENTRY SYSTEMS

Hands-free

FERMAX

Pure lines. Essence. Seduction.
A contemporary jewel.

Beauty sustained by high performance electronics
make **iLOFT the designer's choice.**

Featuring audio and video versions, flush and
surface mounting versions, colour and finished
options and complements: there is an iLOFT model
for each style.

Welcome to the iLOFT COLLECTION.

iLOFT
by **FERMAX**



All iLOFT monitors feature a high resolution 3,5" TFT and high performance audio levels. All set for perfect communication.

Multifunctional buttons are ready for intuitive user operation and configuration through an OSD navigation menu.

The highest manufacturing standards for materials and finishes give iLOFT monitors a special touch.

Discover the iLOFT COLLECTION.



AN iLOFT REFERENCE

iLOFT has been requested by meticulous architects, design consultants and real estate developers worldwide. Reflections is an example.

Located in Singapore, near its historical seafront, Reflections is a 2 million m² residential compound designed by Daniel Libeskind. Six skyscrapers and eleven lower blocks for which iLOFT was the perfect match.



*"Created by Benedito Design Studio, in Barcelona.
A powerhouse for european industrial design that has been
setting trends for the past 35 years".*


iLOFT MONITORS



iLOFT FLUSH

An ABS body dressed by a **transparent polycarbonate sheet** for the glossiest finish.

Once flush-mounted, its maximum thickness is just **13 mm from** the wall, making it compact, light weight and ultra slim.

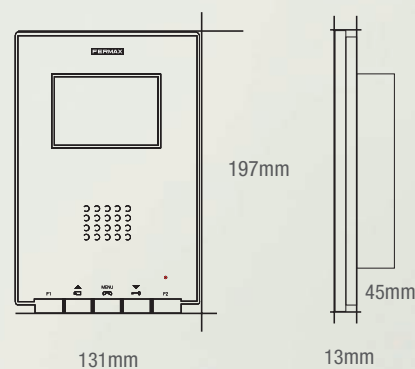

MEASURES (mm)

Flush Monitor: 131x197x58.

FERMAX flush box: 108x158x45.


Universal flush box: 114x174x50.

REFERENCES

- ref.5620 VDS FLUSH iLOFT MONITOR
- ref.5612 BUS2 FLUSH iLOFT MONITOR
- ref.5611 4+N FLUSH iLOFT MONITOR
- ref.5630 iLOFT FLUSH BOX

iLOFT
by **FERMAX**



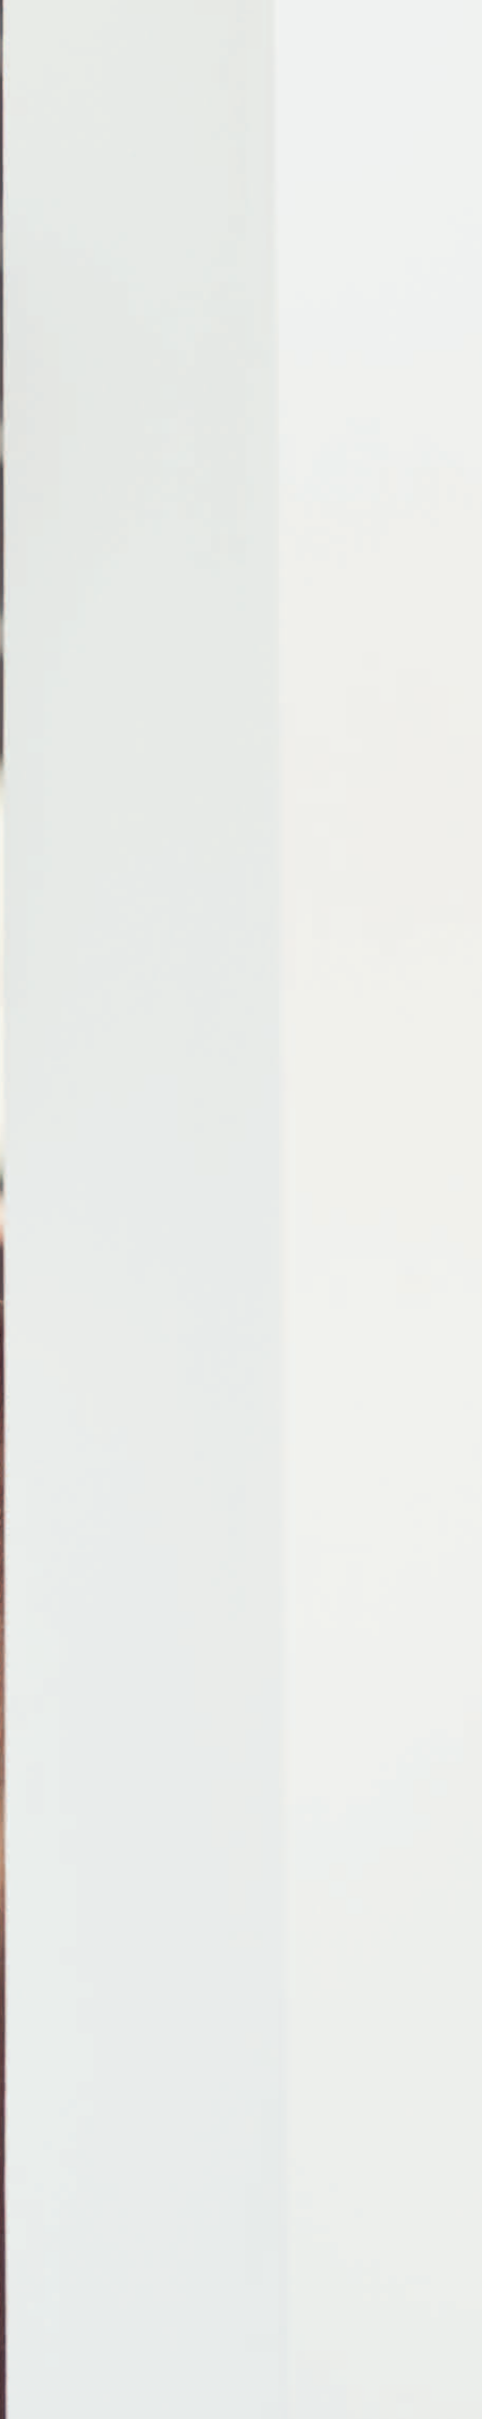


iLOFT SURFACE



iLOFT surface monitor stands out for **convenient and simple** installation.

Wall fitted, it requires **no building works** and can be installed onto any kind of wall.

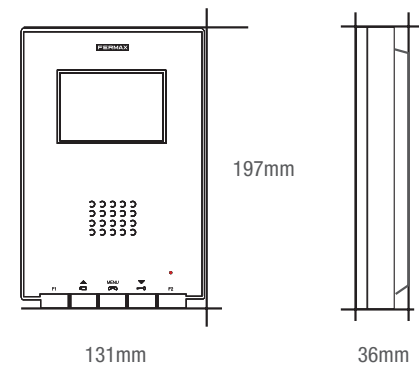

MEASURES (mm)

Surface monitor: 131x197x36.

REFERENCES

ref.5614 VDS SURFACE iLOFT MONITOR
ref.5615 BUS2 SURFACE iLOFT MONITOR

iLOFT
by **FERMAX**

iLOFT PURE MONITORS **iLOFTPURE**
by **FERMAX**

iLOFT PURE FLUSH




iLOFT PURE monitors represent the essence of the iLOFT family.

Matt finish, without the transparent polycarbonate sheet, for minimalism and simplicity.

Flush-built 12 mm of maximum thickness stand out from the wall.

iLOFT
by **FERMAX**

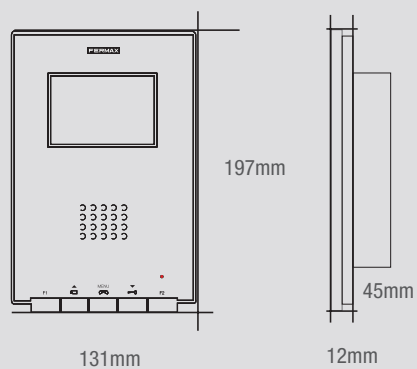

MEASURES (mm)

Flush Monitor: 131x197x57.

FERMAX Flush box: 108x158x45.


Universal Flush box: 114x174x50.

REFERENCES

ref.5616 VDS FLUSH iLOFT PURE MONITOR

ref.5618 BUS2 FLUSH iLOFT PURE MONITOR

ref.5630 iLOFT FLUSH BOX

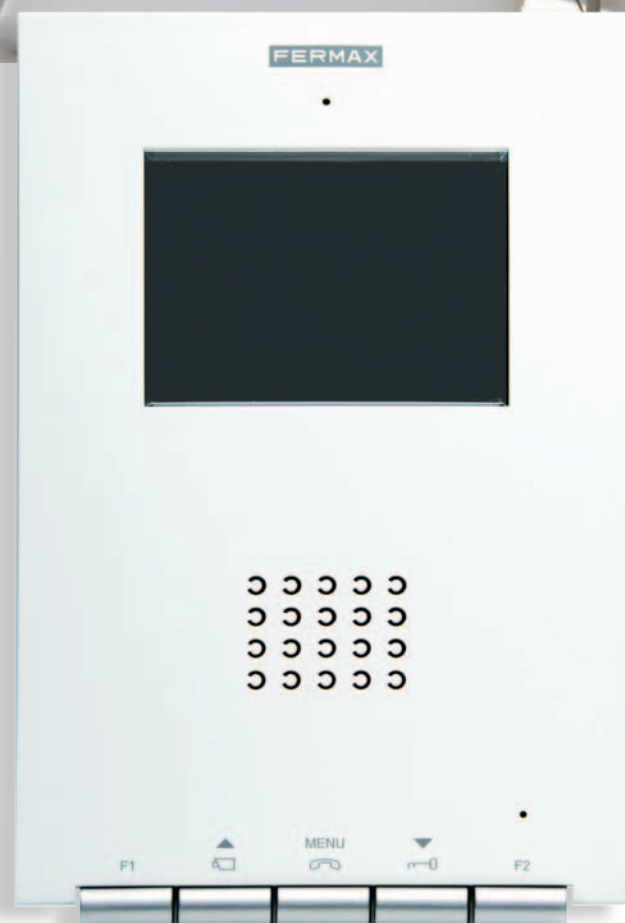



iLOFT PURE SURFACE



The **matt finished** iLOFT PURE monitor also has a surface mounted version.


Securely tightened to the wall, it is **the choice for simple fittings** in any area of the home without the need for any additional works.

MEASURES (mm)

Surface Monitor: 131x197x35.

REFERENCIAS

ref.5606 VDS SURFACE iLOFT PURE MONITOR
ref.5619 BUS2 SURFACE iLOFT PURE MONITOR

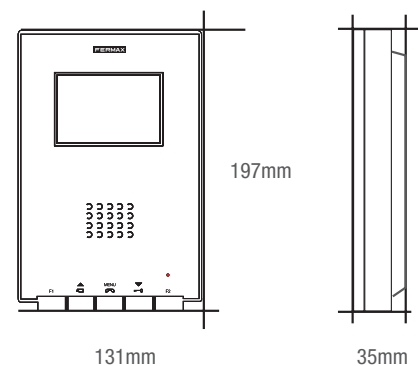

iLOFT
by **FERMAX**

iLOFT COMPLEMENTS





iLOFT TELEPHONE

THE PERFECT COMPLEMENT

An audio terminal for simpler installations or as a secondary unit. **Slim and light**, the iLOFT telephone represents the modesty of elegance.

Still, it is also a technological achievement of digital audio processing to ensure high-quality and echo and interference free communication.

Built in **signalling LEDs and clear iconography** for its pushbuttons make its operation and configuration extremely intuitive.

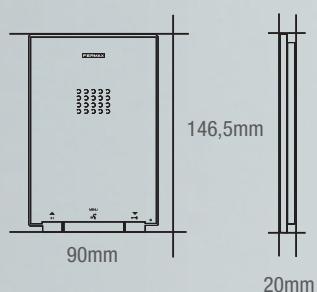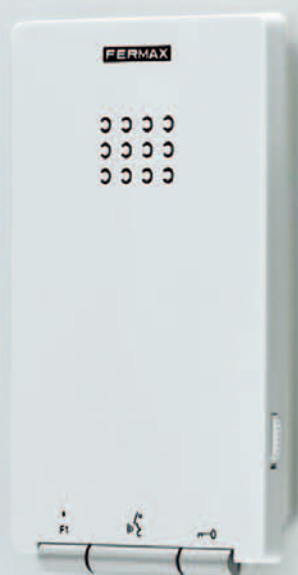

MEASURES (mm)

Telephone: 90x146,5x20.

REFERENCES

ref.5601 VDS iLOFT TELEPHONE

iLOFT
by **FERMAX**



VOLUME CONTROL





CRYSTAL FRAME

Both iLOFT and iLOFT PURE monitors feature a new accessory:
the iLOFT crystal frame.

A 6 mm thick bevelled glass
to be integrated in the most cutting-edge homes. Just for the sake of aesthetics or as a practical accessory to cover signs or gaps left by an older equipment.



MEASURES (mm)

Frame: 189x256x6.


REFERENCES

ref.5631 iLOFT GLASS FRAME

iLOFT
by **FERMAX**



COLOUR RANGE

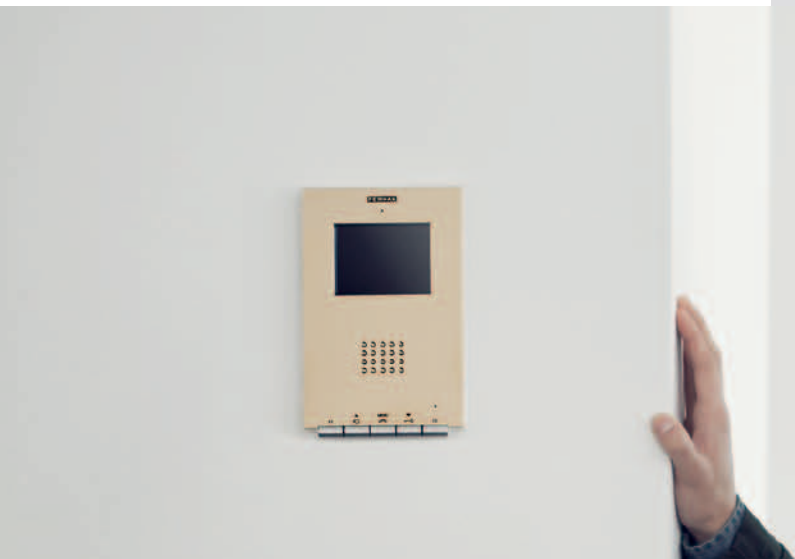


Different homes, personal colours.

Each home has its style and colours are a tool for expression. iLOFT encourages **customization of the spaces.**

A colour touch below the polycarbonate skin.

Gold, Silver and Black are now available in addition to the standard white.

As a painter's board, **iLOFT is a vehicle for beauty.**



REFERENCES

ref.5633 SILVER COVER
ref.5634 BLACK COVER
ref.5635 GOLD COVER

iLOFT
by **FERMAX**



TECHNICAL INFO


Intuitive and user-friendly, iLOFT is designed to run without any specific user configuration.

Image will come up to the screen whenever a call is received.

 opens the two way audio channel for crystal clear hands-free conversation.

 opens the access to the visitor.

Communication ends automatically after 90 seconds or when  is pressed again.

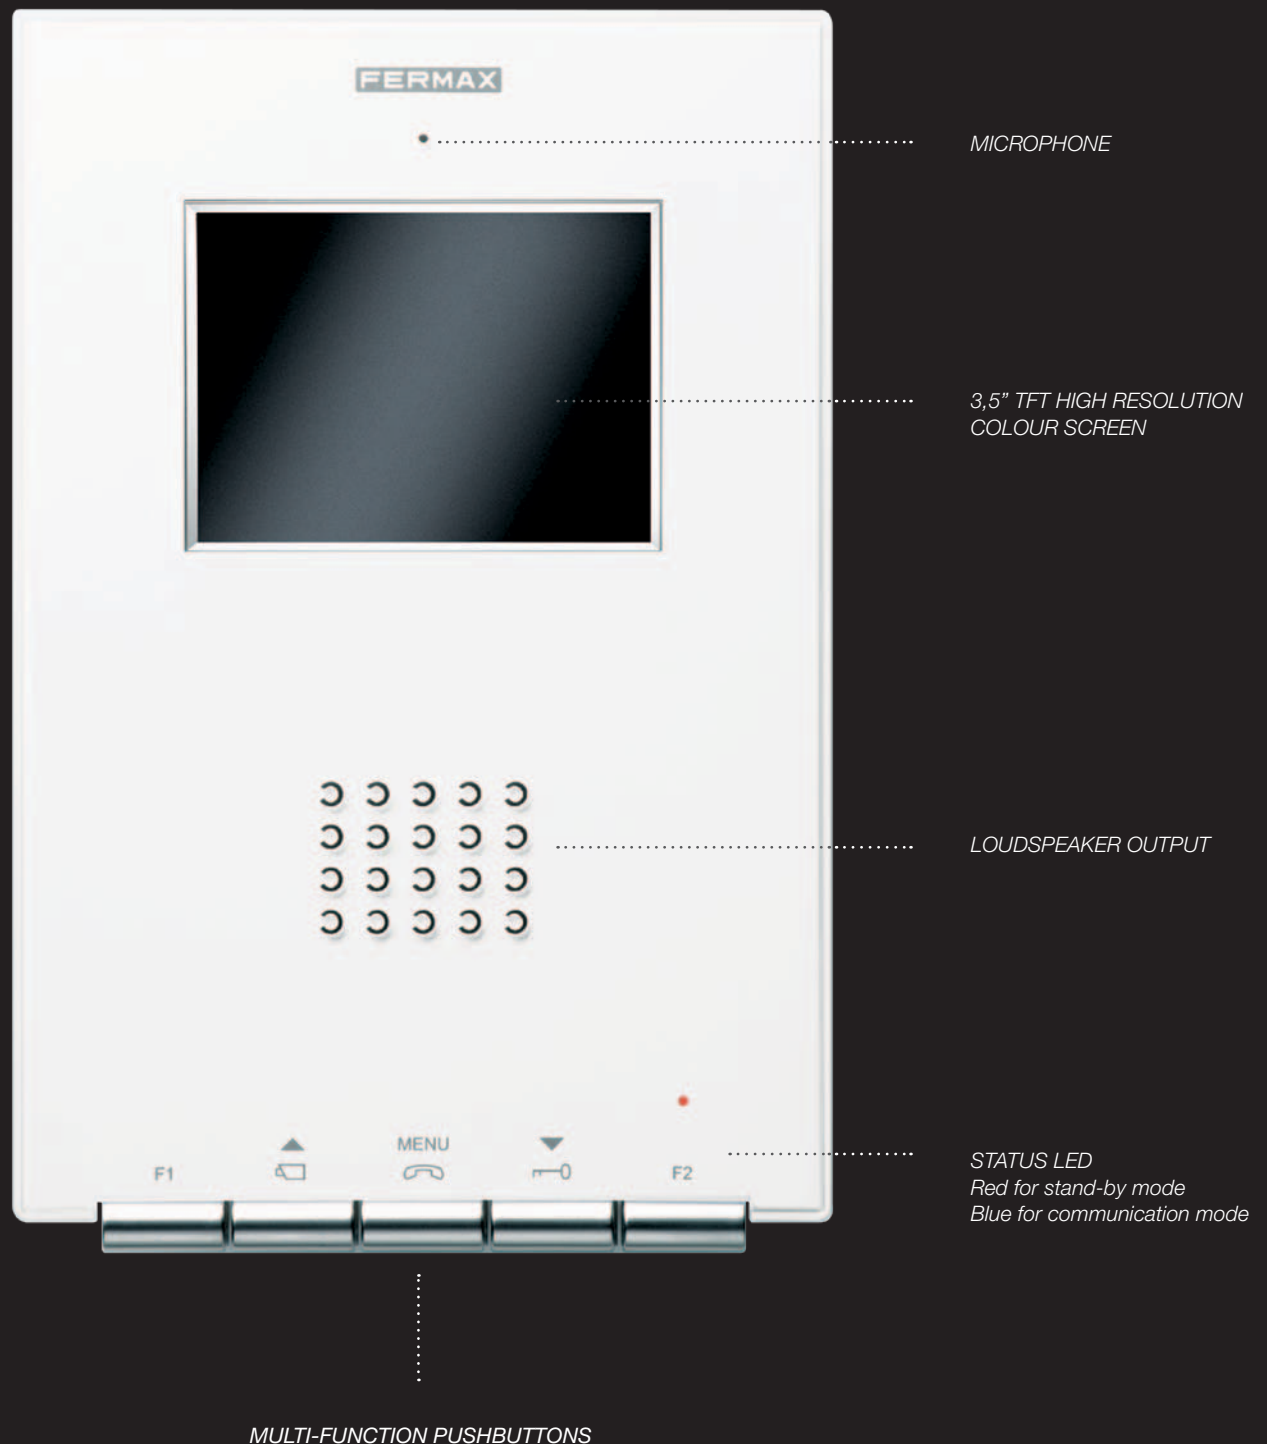

AUTOMATIC AND HANDS-FREE OPERATION

MULTI-FUNCTION PUSHBUTTONS



Open/close audio and video communication with outdoor entry panel.



Open-door pushbutton for access doors to the building/home and guard unit calls.



Camera-on turns on the outdoor entry panel camera for a peak outside without having received a call.



F1-F2

For additional functions set up by the installer such as calling the lift, switching a light, call to guard unit or activating a secondary relay.

▲ MENU ▼

Digital menu for ring tone selection, volume control and video settings.



USER SELECTION



Cityline Outdoor Panel


A simple and easy OSD menu, available in some versions, allows any user to make the most of the iLOFT functionalities.

- **Doormatic function:** allows the monitor to be set, for a given time period, to open the door automatically upon receiving a call.
- **Ring tone selection:** different melodies discriminating by the origin of the call: main outdoor entry panel, secondary access entry panel and door bell.
- **Do Not Disturb:** silent calls for those relaxing moments.




Fermax for integration.

Inductive hearing loop comes as a standard with any iLOFT Collection terminal for transmission to hearing aid devices.



Settings Selection



Melodies Selection



Not Disturb Function



Inductive Loop Selection

iLOFT
by **FERMAX**

INSTALLATION

FLUSH





1 Install FERMAX flush box (ref.5630) or a standard box (114x174x50mm).

2 Fit the installation cables to the monitor connector.

3 Screw the monitor to the flush box and program it with the house unit number.

4 Mount the cover from the upper part and swing downwards to make it fit.

Once the cover is mounted, set the volume/scenes/colour level with the multifunction pushbuttons.

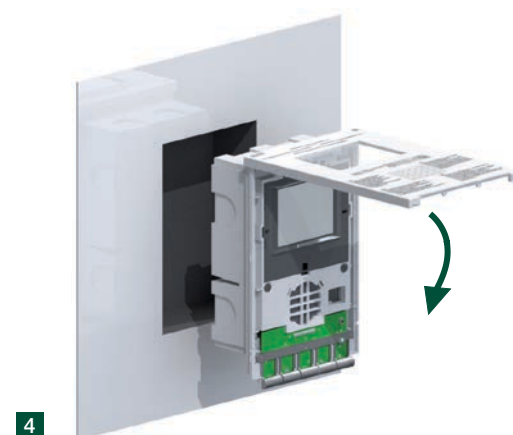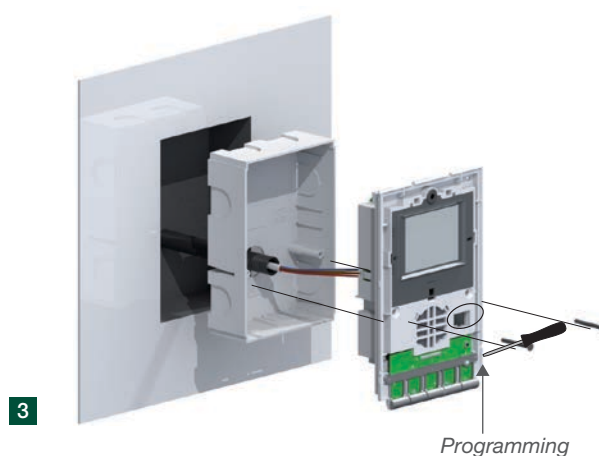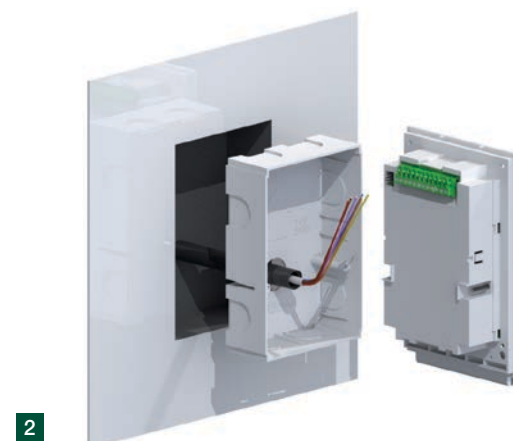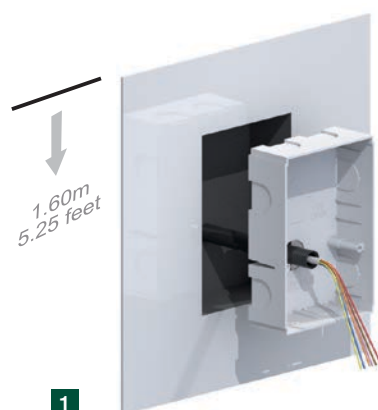


SURFACE

1 Screw monitor base to wall.

2 Fasten the installation cables to the connectors on the back of the monitor.

Anchor the monitor, fitting it to the tabs on the base.

3 Mount the cover from the upper part and swing downwards to make it fit.

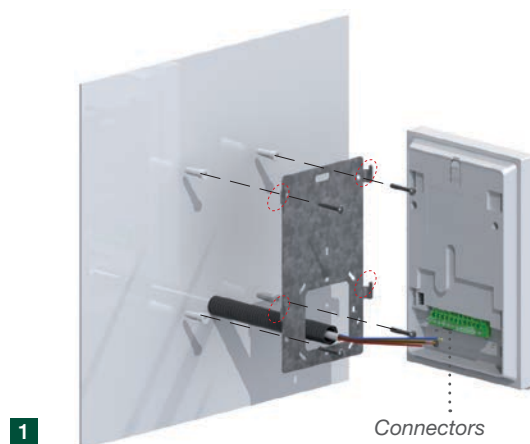

iLOFT COLLECTION REFERENCES

Monitors

	FLUSH	SURFACE
Vds	5620 iLoft Monitor 5616 iLoft Pure Monitor	5614 iLoft Monitor 5606 iLoft Pure Monitor
Bus2	5612 iLoft Monitor 5618 iLoft Pure Monitor	5615 iLoft Monitor 5619 iLoft Pure Monitor
4+N	5611 iLoft Monitor	

Complements

TELEPHONE	5601 iLoft VDS Telephone
FLUSH BOX	5630 iLoft Flush box
GLASS FRAME	5631 Crystal iLoft Frame
FRONTAL COVERS	5633 iLoft Silver Cover 5634 iLoft Black Cover 5635 iLoft Gold Cover





Audio and Video Door Entry Systems

VIDEO DOOR ENTRY SYSTEMS

www.fermax.com